



## **SPECIFICATIONS**



# ProVersa M410-LS

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC

# NSF/ANSI 372 NSF/ANSI 61-9

#### AVAILABLE MODELS

M410 - 4 X 1/2"-14 NPT Connection W/Stops

#### M410-LS - 4 X 1/2"-14 NPT Connection W/O Stops

M410CEPX - 3 X 1/2" CEPX Connections & 1X 1/2"-14 NPT W/Stops M410CEPX-LS - 3 X 1/2" CEPX Connections & 1X 1/2"-14 NPT W/O Stops M410PEX - 3 X 1/2" PEX Connections & 1X 1/2"-14 NPT W/Stops M410PEX-LS – 3 X ½" PEX Connections & 1X 1/2"-14 NPT W/O Stops M410PEXCT – 3 X ½" PEX Connections & 1X 1/2"-14 NPT W/Stops & ½" Pre-soldered copper tube for spout connection.

M410PEXCT-LS - 3 X 1/2" PEX Connections & 1X 1/2"-14 NPT W/O Stops & ½" Pre-soldered copper tube for spout connection.

COMPATIBLE CARTRIDGE - M410-CCR


OPTIONAL EXTENSION - MRIV-EXT

Mainline products have been manufactured under the highest standards of quality and workmanship. That is why we offer "Limited Lifetime" warranty on the functionality of our rough-in valves.

#### **Features**

- Pro versa Tub & Shower Rough-in valve W/O Stops
- Pressure Balance Valve
- Pro-Versa Ceramic Disc Cartridge
- (Included with the Mainline 11 & 511 Series trims)
- Adjustable temperature limit stop to control maximum hot water
- Includes Plaster Guard and Pressure-Test Cap
- Flow Rate: 26.5 LPM/7.0 GPM at 60 psi
- **Brass Construction**
- 4 X 1/2''-14 NPT Connection
- With Check Valve
- Suited for standard Back-to-back and thin wall installation
- Easy-to-access mounting system (Hardware included)
- 100% Factory Tested
- Optional Add-on: MRIV-EXT Rough-in Valve Deep Wall installation Kit

#### **Drawings**

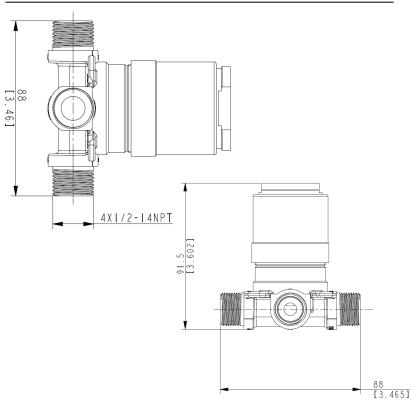

Please visit www.mainlinecollection.ca for more information.

### SUBMITTAL INFORMATION

Name:	Contractor:
Location:	Contact #:
Notes:	