



SPECIFICATIONS



Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/cUPC

NSF/ANSI 372 NSF/ANSI 61-9

AVAILABLE MODELS

M420 - 4 X 1/2''-14 NPT Connection W/Stops
M420-LS - 4 X 1/2''-14 NPT Connection W/O Stops
M420CEPX - 3 X ½" CEPX Connections & 1X 1/2''-14 NPT W/Stops
M420CEPX-LS - 3 X ½" CEPX Connections & 1X 1/2''-14 NPT W/O Stops
M420PEX - 3 X ½" PEX Connections & 1X 1/2''-14 NPT W/O Stops
M420PEX-LS - 3 X ½" PEX Connections & 1X 1/2''-14 NPT W/Stops

COMPATIBLE CARTRIDGE - M420-CCR


OPTIONAL EXTENSION - MRIV-EXT

Mainline products have been manufactured under the highest standards of quality and workmanship. That is why we offer "Limited Lifetime" warranty on the functionality of our rough-in valves.

Features

- Pro versa Tub & Shower Rough-in valve (2-way) W/O stops
- Pressure Balance Valve built-in diverter function (Non-Share)
- Pro-Versa Ceramic Disc Cartridge
- Function Limiter included to reduce to Single Function
- (Included with the Mainline 611 Series trims)
- · Adjustable temperature limit stop to control maximum hot water
- Includes Plaster Guard and Pressure-Test Cap
- Flow Rate: 26.5 LPM/7.0 GPM at 60 psi
- Brass Construction
- 3X 1/2" Crimp Pex Connections
- 1 X 1/2''-14 NPT Connection
- With Check Valve
- Suited for standard Back-to-back and thin wall installation
- Easy-to-access mounting system (Hardware included)
- 100% Factory Tested
- Optional Add-on: MRIV-EXT Rough-in Valve Deep Wall installation Kit

Drawings

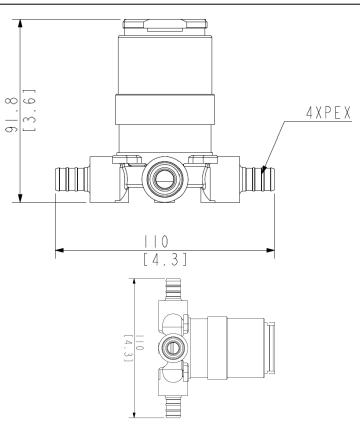

Please visit www.mainlinecollection.ca for more information.

SUBMITTAL INFORMATION

Name:	Contractor:
Location:	Contact #:
Notes:	