



MAINLINE®

Preferred by the pros.™

Brass Ball Valves


Lead Free* Full Port

SPECIFICATIONS




Solder X PEX Connections

Drawings

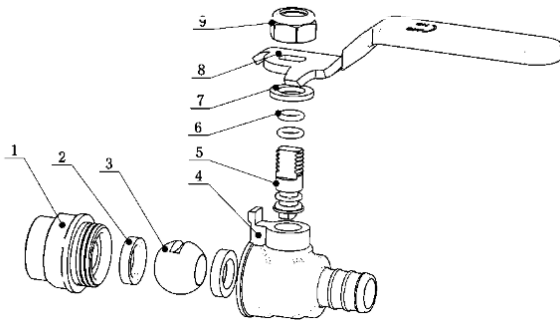

Dimensions (inches), & Valve Data:

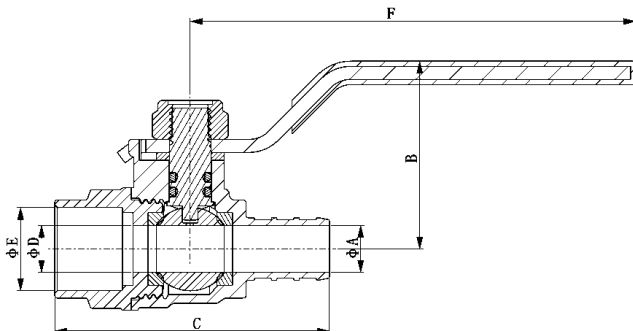

Features

- Maximum temperature 100°C/212°F
- Lead Free Brass Body
- Full Port
- Lead Free Brass Ball
- CSA, NSF-61, NSF-372 Certified
- Warranty – Limited 3 Year

MODELS

PART#	SIZE	INNER BOX QTY	CARTON QTY
MLBVF4121	1/2"	10	100
MLBVF4341	3/4"	10	100
MLBVF4011	1"	10	50

Parts*

NO	PART	MATERIAL	SPECIFICATION
1	Bonnet	Lead Free Brass	C46500
2	Ball Seat	PTFE	PTFE
3	Ball	Lead Free Brass	C46500
4	Body	Lead Free Brass	C46500
5	Stem	Brass	C38510
6	O-ring	Rubber	EPDM
7	Filler	PTFE	PTFE
8	Handle	Steel	#35
9	Nut	Steel	#35

- Parts List provided for reference purpose. Only Handles available for replacement

SIZE	1/2"	3/4"	1"
ΦA	0.354	0.534	0.713
B	1.417	1.555	1.752
C	2.075	2.480	3.240
ΦD	0.354	0.551	0.748
ΦE	0.627	0.877	1.128
F	3.366	3.366	3.701

Pressure & Temperature Range

TEMPERATURE RANGE	OPERATING TEMPERATURE	MIN & MAX PRESSURE RATINGS, PSI
-4°F - 212°F -20°C - 100°C	-4°F - 176°F -20°C - 80°C	0 - 400 PSI

Service & Parts

Please reach out to epleservice@emcoltd.com for support/ visit mainlinecollection.ca / CANADA +1 (450) 621 5636